
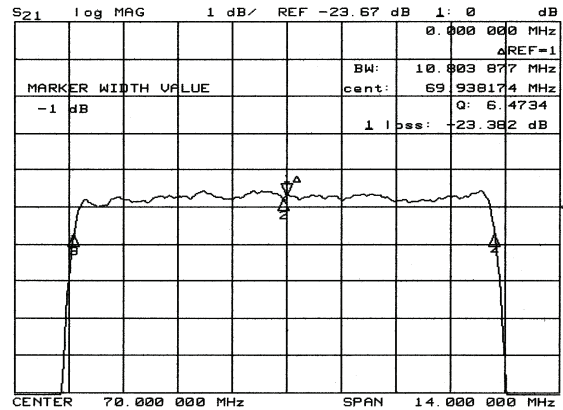



### Typical Performance

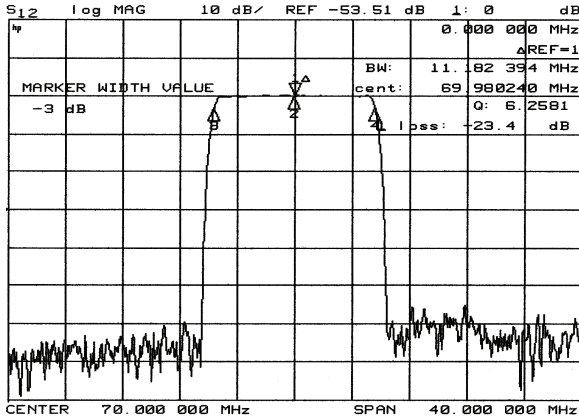

### Specification

Index	Unit	Min	Typical	Max
Center Frequency	MHz	69.92	70	70.08
Insertion Loss	dB	-	23.5	25
1 dB Bandwidth	MHz	10.6	10.8	-
3 dB Bandwidth	MHz	11	11.15	-
40 dB Bandwidth	MHz	-	12.65	12.8
Passband Ripple	dB	-	0.45	0.8
Group Delay Variation	nsec	-	80	120
Absolute Delay	µsec	-	2.33	-
Ultimate Attenuation	dB	50	60	-
Substrate Material		128- LiNbO3		
Temperature Coefficient	ppm/°C	-72		
Package	mm	0		

### Package Dimension

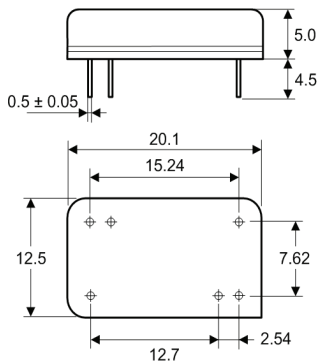

### Matching Configuration

