
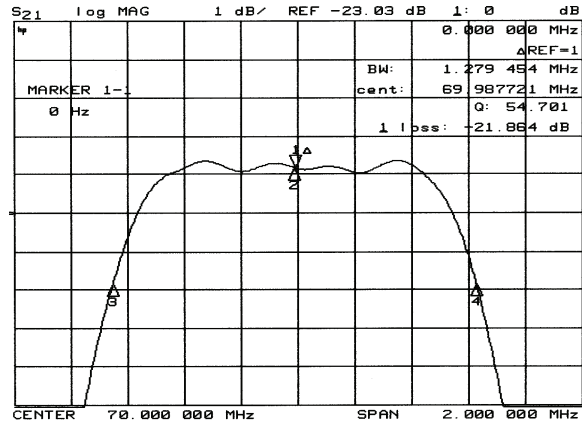



### Typical Performance

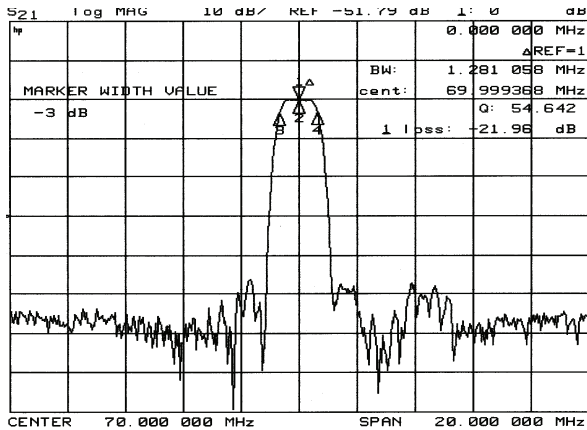

### Specification

Index	Unit	Min	Typical	Max
Center Frequency	MHz	69.92	70	70.08
Insertion Loss	dB	-	22	24
1 dB Bandwidth	MHz	-	-	-
3 dB Bandwidth	MHz	1.23	1.26	-
40 dB Bandwidth	MHz	-	2.15	2.4
Passband Ripple	dB	-	0.35	0.8
Group Delay Variation	nsec	-	80	150
Absolute Delay	μsec	-	2.45	-
Ultimate Attenuation	dB	45	50	-
Substrate Material		Quartz		
Temperature Coefficient	ppm/°C	-0.03		
Package	mm	-		

### Package Dimension

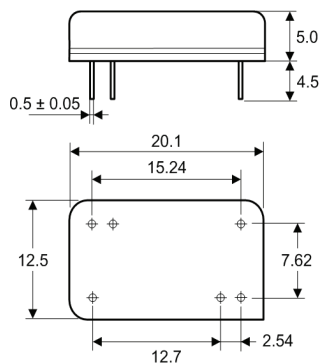

### Matching Configuration

