
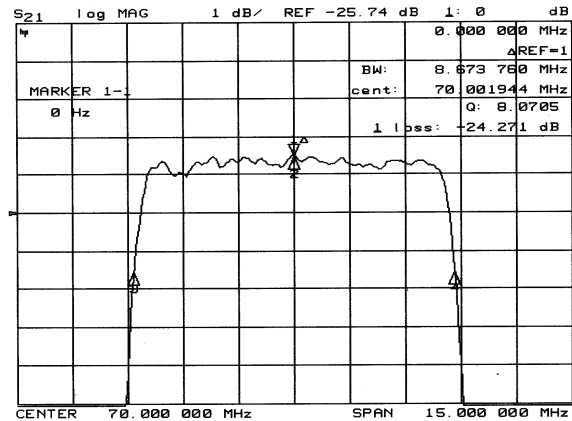



Typical Performance

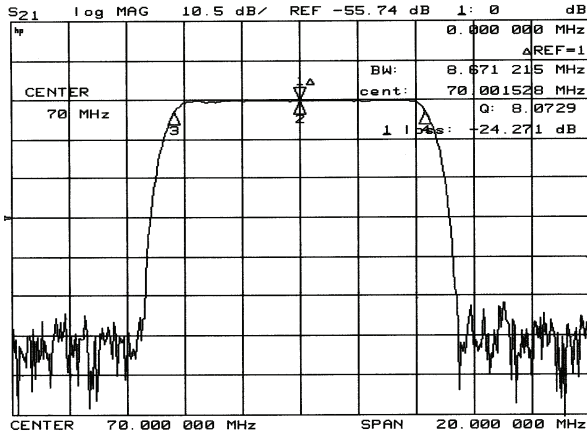

Specification

Index	Unit	Min	Typical	Max
Center Frequency	MHz	69.92	70	70.08
Insertion Loss	dB	-	23.5	25
1 dB Bandwidth	MHz	-	-	-
3 dB Bandwidth	MHz	11.95	12.05	-
40 dB Bandwidth	MHz	-	13.45	13.6
Passband Ripple	dB	-	0.45	0.8
Group Delay Variation	nsec	-	80	150
Absolute Delay	µsec	-	2.35	-
Ultimate Attenuation	dB	50	55	-
Substrate Material		128-LiNbO3		
Temperature Coefficient	ppm/°C	-72		
Package	mm	-		

Package Dimension

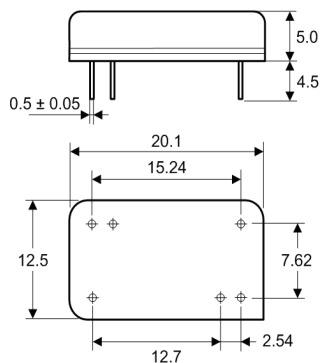

Matching Configuration

