
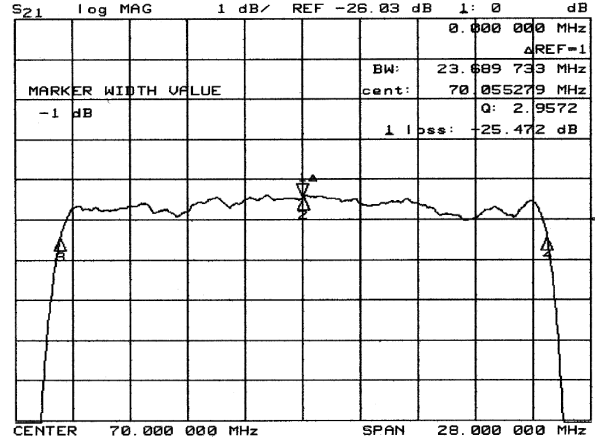



### Typical Performance

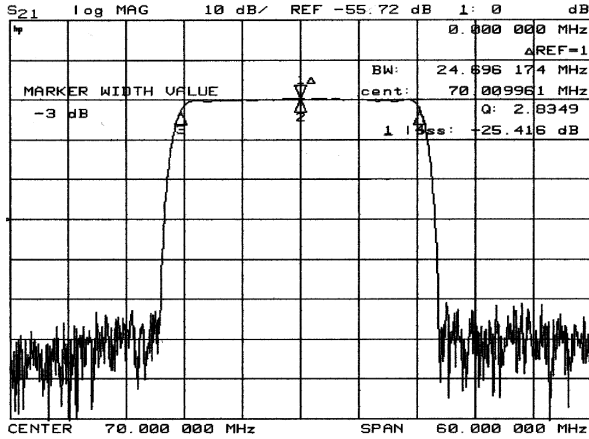

### Specification

Index	Unit	Min	Typical	Max
Center Frequency	MHz	69.92	70.00	70.08
Insertion Loss	dB	-	25.5	27.0
1 dB Bandwidth	MHz	23.50	23.68	-
3 dB Bandwidth	MHz	24.50	24.70	-
40 dB Bandwidth	MHz	-	28.35	28.50
Passband Ripple	dB	-	0.35	0.80
Group Delay Variation	nsec	-	80	150
Absolute Delay	μsec	-	1.20	-
Ultimate Rejection	dB	50	55	-
Substrate Material	-	128-LiNbO3		
Temperature Coefficient	ppm/°C	-72		
Package	mm	20		

### Package Dimension

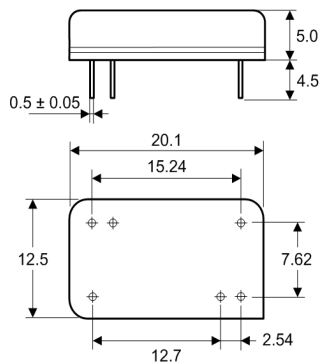

### Matching Configuration

