
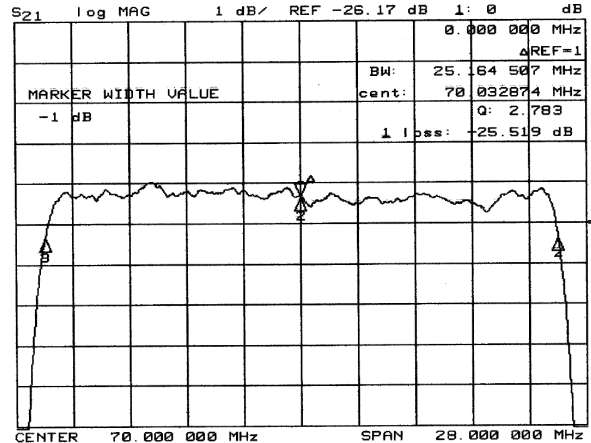



### Typical Performance

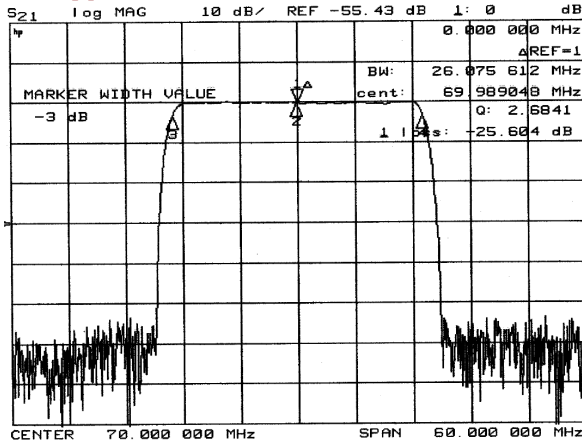

### Specification

Index	Unit	Min	Typical	Max
Center Frequency	MHz	69.92	70.00	70.08
Insertion Loss	dB	-	25.5	27.0
1 dB Bandwidth	MHz	25.00	25.15	-
3 dB Bandwidth	MHz	25.80	26.00	-
40 dB Bandwidth	MHz	-	29.38	29.50
Passband Ripple	dB	-	0.65	1.00
Group Delay Variation	nsec	-	50	100
Absolute Delay	μsec	-	1.56	-
Ultimate Rejection	dB	50	55	-
Substrate Material	-	128-LiNbO3		
Temperature Coefficient	ppm/°C	-72		
Package	mm	20		

### Package Dimension

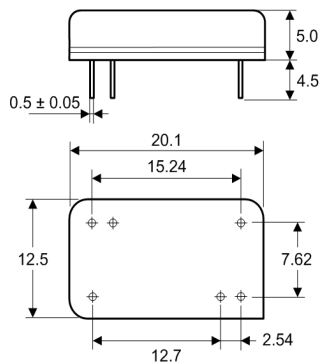

### Matching Configuration

