
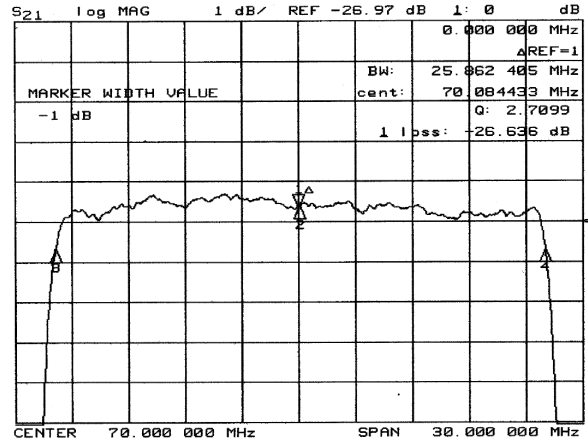



Typical Performance

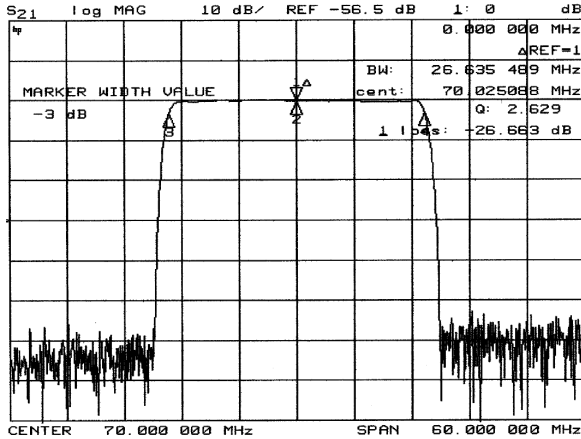

Specification

Index	Unit	Min	Typical	Max
Center Frequency	MHz	69.92	70.00	70.08
Insertion Loss	dB	-	26.5	28.0
1 dB Bandwidth	MHz	25.60	25.85	-
3 dB Bandwidth	MHz	26.50	26.65	-
40 dB Bandwidth	MHz	-	29.38	29.50
Passband Ripple	dB	-	0.75	1.00
Group Delay Variation	nsec	-	50	100
Absolute Delay	µsec	-	1.45	-
Ultimate Rejection	dB	50	55	-
Substrate Material	-	128-LiNbO3		
Temperature Coefficient	ppm/°C	-72		
Package	mm	20		

Package Dimension

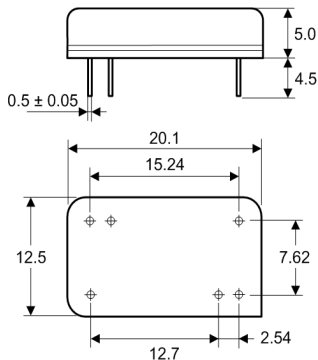

Matching Configuration

