
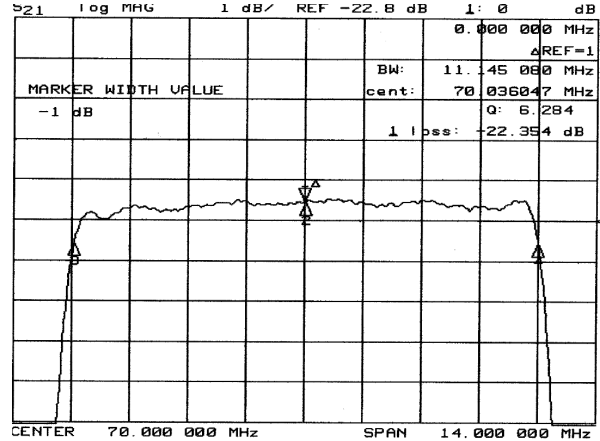



Typical Performance

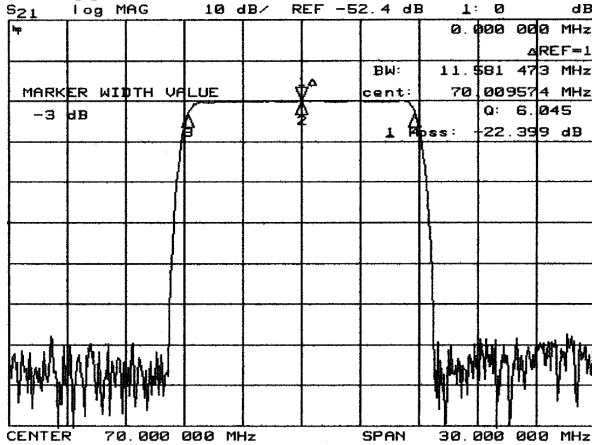

Specification

Index	Unit	Min	Typical	Max
Center Frequency	MHz	69.92	70.00	70.08
Insertion Loss	dB	-	22.5	24.0
1 dB Bandwidth	MHz	11.00	11.15	-
3 dB Bandwidth	MHz	11.40	11.58	-
40 dB Bandwidth	MHz	-	13.45	13.70
Passband Ripple	dB	-	0.55	1.00
Group Delay Variation	nsec	-	50	100
Absolute Delay	µsec	-	2.03	-
Ultimate Rejection	dB	50	60	-
Substrate Material	-	128-LiNbO3		
Temperature Coefficient	ppm/°C	-72		
Package	mm	20		

Package Dimension

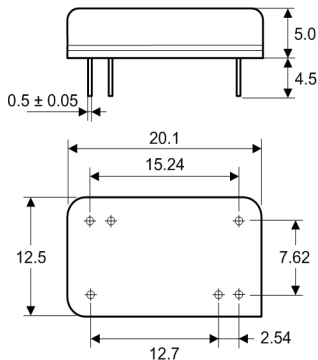

Matching Configuration

