



### Typical Performance

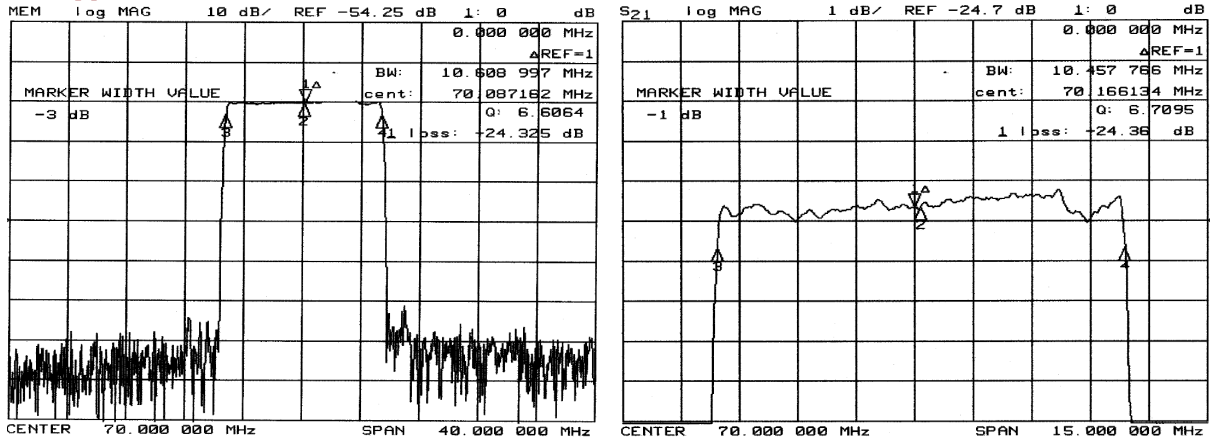

### Specification

Index	Unit	Min	Typical	Max
Center Frequency	MHz	69.92	70.00	70.08
Insertion Loss	dB	-	24.5	26.0
1 dB Bandwidth	MHz	10.35	10.45	-
3 dB Bandwidth	MHz	10.50	10.60	-
40 dB Bandwidth	MHz	-	11.36	11.50
Passband Ripple	dB	-	0.75	1.00
Group Delay Variation	nsec	-	70	120
Absolute Delay	μsec	-	3.90	-
Ultimate Rejection	dB	50	55	-
Substrate Material	-	128-LiNbO3		
Temperature Coefficient	ppm/°C	-72		
Package	mm	35		

### Package Dimension

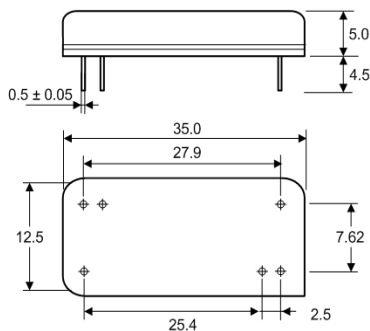

### Matching Configuration

