



Typical Performance

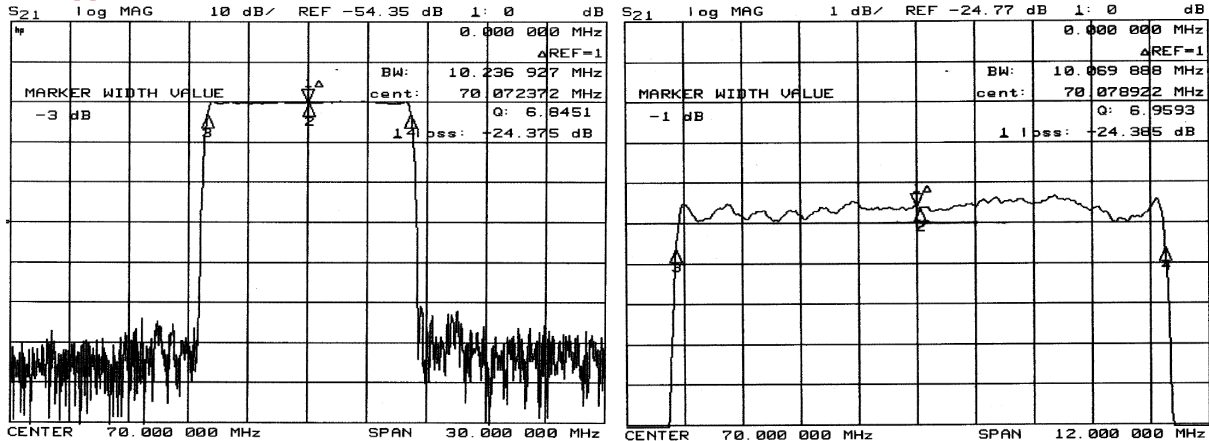

Specification

Index	Unit	Min	Typical	Max
Center Frequency	MHz	69.92	70.00	70.08
Insertion Loss	dB	-	24.5	26.0
1 dB Bandwidth	MHz	10.00	10.06	-
3 dB Bandwidth	MHz	10.20	0.23	-
40 dB Bandwidth	MHz	-	0.93	11.10
Passband Ripple	dB	-	0.85	1.00
Group Delay Variation	nsec	-	70	120
Absolute Delay	µsec	-	3.80	-
Ultimate Rejection	dB	50	55	-
Substrate Material	-	128-LiNbO3		
Temperature Coefficient	ppm/°C	-72		
Package	mm	35		

Package Dimension

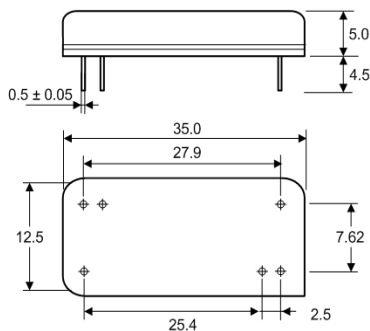

Matching Configuration

