
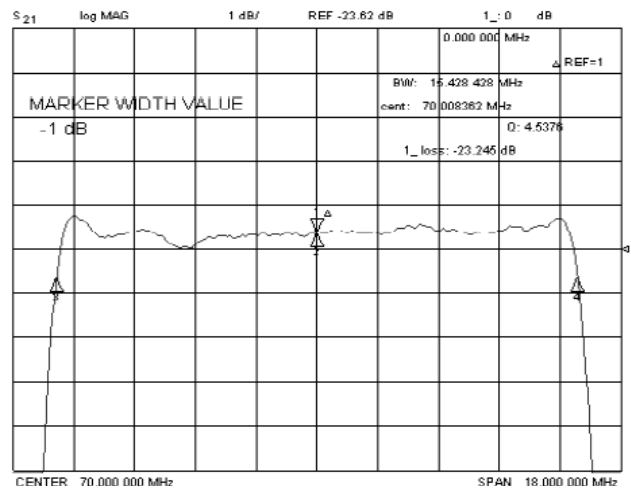



Typical Performance

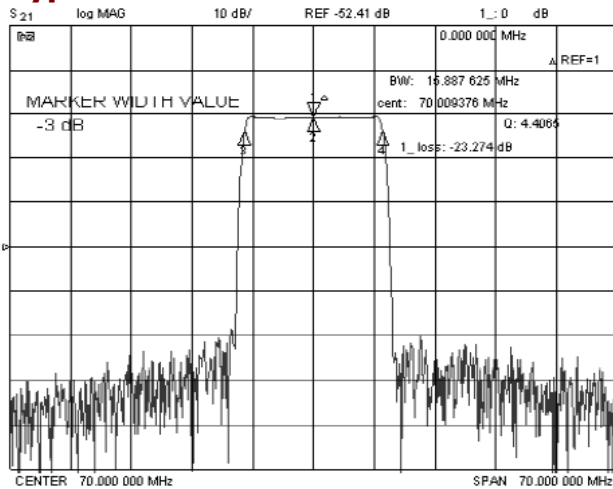

Specification

Index	Unit	Min	Typical	Max
Center Frequency	MHz	69.92	70	70.08
Insertion Loss	dB	-	23.27	25.0
1 dB Bandwidth	MHz	15	15.42	-
3 dB Bandwidth	MHz	-	15.88	-
40 dB Bandwidth	MHz	-	17.88	18
Passband Ripple	dB	-	0.75	1
Group Delay Variation	nsec	-	50	100
Absolute Delay	usec	-	1.52	-
Ultimate Attenuation	dB	40	48	-
Temperature Coefficient	ppm/°C	-	-72	-
Substrate Material		128 LiNbO ₃		
Package	mm ³	13.3 x 6.5 x 2.0		

Package Dimension

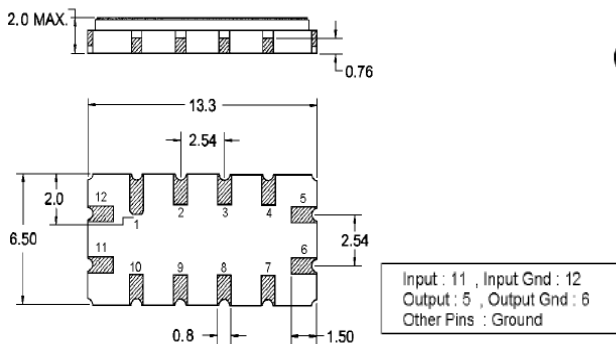

Matching Configuration

