
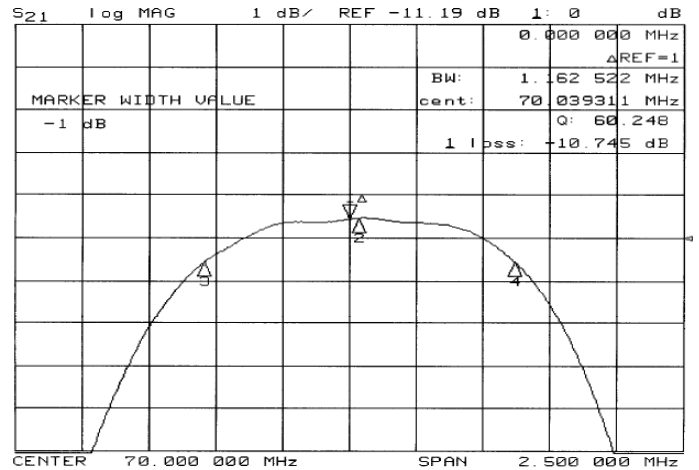



Typical Performance

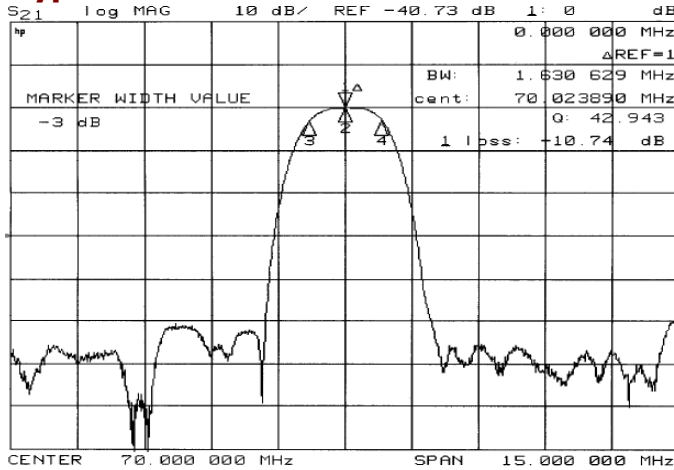

Specification

Index	Unit	Min	Typical	Max
Center Frequency	MHz	69.9	70	70.1
Insertion Loss	dB	-	11	13
1 dB Bandwidth	dB	-	1.16	-
3 dB Bandwidth	dB	1.5	1.6	-
40 dB Bandwidth	dB	-	3.44	4
Passband Ripple	dB	-	0.55	1
Group Delay Variation	nsec	-	65	90
Absolute Delay	usec	-	1.38	-
Ultimate Attenuation	dB	40	50	-
Temperature Coefficient	ppm/°C	-	-20	-
Substrate Material		LiTaO ₃		
Package	mm ³	13.3 x 6.5 x 2.0		

Package Dimension

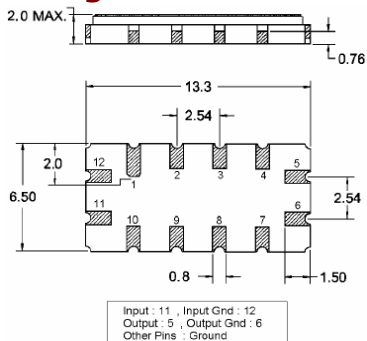

Matching Configuration

